


DM1600 2C EVO

/ DOUBLE-SIDED EDGE ROUNDING MACHINE



DEMONSTRATION VIDEO

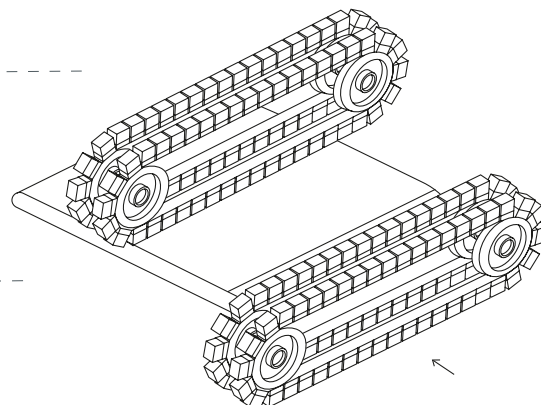

OVERVIEW

__ One solution for all parts: double-side edge rounding of parts longer than 150mm and single side of parts from 50x50mm

__ Processes simultaneously both sides of metal sheet parts cut by laser or punching machine, saving time and reducing operation costs

__ Integrated touch screen panel for monitoring the working settings and the machine alarms


__ Touchscreen panel for machine control, remote process monitoring, operation statistics and alarms overview

TECHNICAL SPECIFICATIONS

working capacity (mm)	1600x50
feeding speed (m/min.)	0.6-3.2
crossbelt speed (m/s)	2-8
crossbelt motor (kW)	4 (4x)
total power (kW)	17
consumption (A)	30
dimensions (mm)	2050x3050x2150
weight (kg)	3300



__ easy and tool free cross belt replacement

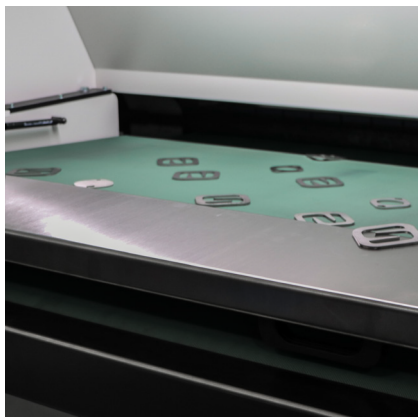

__ single-sided process for parts as small as 50x50mm thanks to on additional conveyor and support table



__ after DM1600 2C EVO: high performance on all edges and also on internal holes